

Features


- 1) Low on-resistance
- 2) Fast switching speed
- 3) Fast reverse recovery
- 4) Easy to parallel
- 5) Simple to drive
- 6) Pb-free lead plating ; RoHS compliant

Parameter	Rating	Units
V_{DS}	1200	V
$I_D @ 25^\circ\text{C}$	8	A
$R_{DS(on)}$	350	m Ω




Applications

- Solar inverters
- DC/DC converters
- Switch mode power supplies
- Induction heating



TO-247-3
Package



- (1) Gate
(2) Drain
(3) Source

*1 Body Diode

Maximum Ratings ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
V_{DSmax}	Drain - Source Voltage	1200	V	$V_{GS} = 0\text{ V}, I_b = 100\ \mu\text{A}$	
V_{GSmax}	Gate - Source Voltage (dynamic)	-8/+19	V	AC ($f > 1\text{ Hz}$)	
V_{GSop}	Gate - Source Voltage (static)	-4/+15	V	Static	
I_D	Continuous Drain Current	8	A	$V_{GS} = 15\text{ V}, T_C = 25^\circ\text{C}$	
		6		$V_{GS} = 15\text{ V}, T_C = 100^\circ\text{C}$	
$I_{D(pulse)}$	Pulsed Drain Current	20	A	Pulse width t_p limited by T_{jmax}	
P_D	Power Dissipation	52	W	$T_C = 25^\circ\text{C}, T_J = 150^\circ\text{C}$	
T_J, T_{stg}	Operating Junction and Storage Temperature	-55 to +150	$^\circ\text{C}$		
T_L	Solder Temperature	260	$^\circ\text{C}$	1.6mm (0.063") from case for 10s	
M_d	Mounting Torque	1	Nm lbf-in	M3 or 6-32 screw	
		8.8			

Note (1): When using MOSFET Body Diode $V_{GSmax} = -4\text{V}/+19\text{V}$

Note (2): MOSFET can also safely operate at $0/+15\text{V}$



Electrical Characteristics (T_c = 25°C unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
V _{(BR)DSS}	Drain-Source Breakdown Voltage	1200			V	V _{GS} = 0 V, I _D = 100 μA	
V _{GS(th)}	Gate Threshold Voltage	1.8	2.5	3.6	V	V _{DS} = V _{GS} , I _D = 1 mA	
			2.0		V	V _{DS} = V _{GS} , I _D = 1 mA, T _J = 150°C	
I _{DSS}	Zero Gate Voltage Drain Current		1	50	μA	V _{DS} = 1200 V, V _{GS} = 0 V	
I _{GSS}	Gate-Source Leakage Current		10	250	nA	V _{GS} = 15 V, V _{DS} = 0 V	
R _{DS(on)}	Drain-Source On-State Resistance		350	460	mΩ	V _{GS} = 15 V, I _D = 3.6 A	
			528			V _{GS} = 15 V, I _D = 3.6 A, T _J = 150°C	
g _{fs}	Transconductance		3.1		S	V _{DS} = 20 V, I _{DS} = 3.6 A	
			2.6			V _{DS} = 20 V, I _{DS} = 3.6 A, T _J = 150°C	
C _{iss}	Input Capacitance		297		pF	V _{GS} = 0 V, V _{DS} = 800 V f = 1 MHz V _{AC} = 25 mV	
C _{oss}	Output Capacitance		20				
C _{rss}	Reverse Transfer Capacitance		3.4				
E _{oss}	C _{oss} Stored Energy		10.6				
E _{ON}	Turn-On Switching Energy (SiC Diode FWD)		131		μJ	V _{DS} = 800 V, V _{GS} = -4 V/15 V, I _D = 3.6 A, R _{G(ext)} = 2.5 Ω, L = 716 μH, T _J = 150°C	
E _{OFF}	Turn Off Switching Energy (SiC Diode FWD)		5				
E _{ON}	Turn-On Switching Energy (Body Diode FWD)		162		μJ	V _{DS} = 800 V, V _{GS} = -4 V/15 V, I _D = 3.6 A, R _{G(ext)} = 2.5 Ω, L = 716 μH, T _J = 150°C	
E _{OFF}	Turn Off Switching Energy (Body Diode FWD)		5				
t _{d(on)}	Turn-On Delay Time		25		ns	V _{DD} = 800 V, V _{GS} = -4 V/15 V I _D = 3.6 A, R _{G(ext)} = 2.5 Ω, Timing relative to V _{DS} Inductive load	
t _r	Rise Time		16				
t _{d(off)}	Turn-Off Delay Time		15				
t _f	Fall Time		17				
R _{G(int)}	Internal Gate Resistance		7		Ω	f = 1 MHz, V _{AC} = 25 mV	
Q _{gs}	Gate to Source Charge		6		nC	V _{DS} = 800 V, V _{GS} = -4 V/15 V I _D = 3.6 A Per IEC60747-8-4 pg 21	
Q _{gd}	Gate to Drain Charge		9				
Q _g	Total Gate Charge		19				

Reverse Diode Characteristics (T_c = 25°C unless otherwise specified)


Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V _{SD}	Diode Forward Voltage	4.5		V	V _{GS} = -4 V, I _{SD} = 1.8 A	
		4.0		V	V _{GS} = -4 V, I _{SD} = 1.8 A, T _J = 150 °C	
I _S	Continuous Diode Forward Current		9.9	A	V _{GS} = -4 V, T _J = 25 °C	
I _{S, pulse}	Diode pulse Current		20	A	V _{GS} = -4 V, pulse width t _p limited by T _{Jmax}	
t _{rr}	Reverse Recover time	26		ns	V _{GS} = -4 V, I _{SD} = 3.6 A, V _R = 800 V dif/dt = 850 A/μs, T _J = 150 °C	
Q _{rr}	Reverse Recovery Charge	71		nC		
I _{rrm}	Peak Reverse Recovery Current	4		A		

Thermal Characteristics



Symbol	Parameter	Typ.	Unit	Test Conditions	Note
R _{θJC}	Thermal Resistance from Junction to Case	2.5	°C/W		

Package Dimensions

Unit: mm

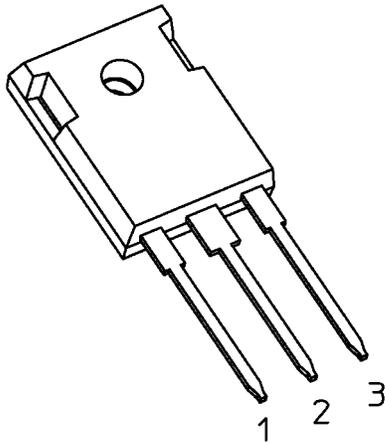

TO-247-3

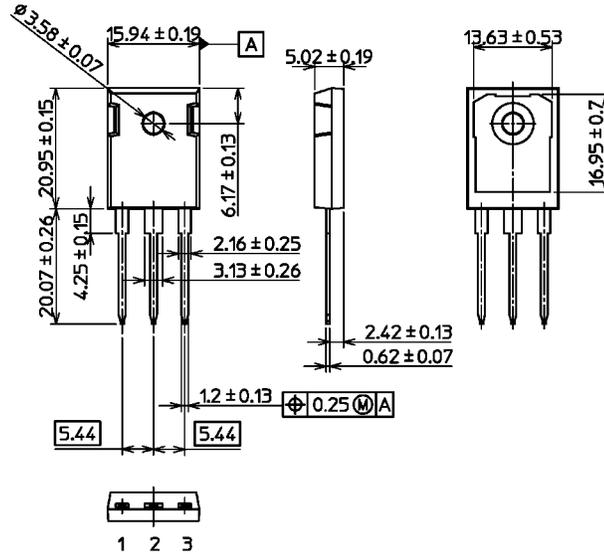
Recommended Solder Pad Layout


TO-247-3